
U.S. PUBLIC LAND SURVEY MONUMENT RECORD

For Public Land Survey Corners in the Lima T. 4 N., R. 14 E.

CORNER CODE INDEX



PLACE MONUMENT SYMBOL (*) AT PROPER LOCATION ON ABOVE INDEX


IF AVAILABLE STATE PLANE COORDINATES


North (Y)309,574.49 Eleve. (Z) 829

East (X)2,325,365,78 Zone South


Hor. Datum ____ Vert. Datum

For Miscellaneous Corners within Sec.





- Above code numbers are positioned Meander, Claim, or Fractional corners of the section.
- Township corner code numbers shall be applied to the corners of above typical section.




CORNER MONUMENT

O WITNESS MONUMENT

S 1/4 COR OF SEC 36 T5N R14E

FOUND 1 1/4" ALUM PIPE WITH CAP



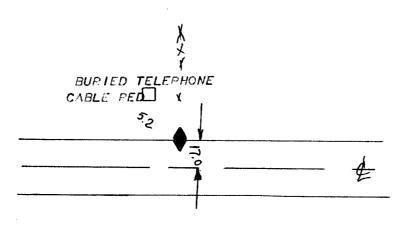

LIMA FIELD Book Page 47

MANAT

SHOW A PLAN VIEW DRAWING DEPICTING THE CORNER MONUMENT AND SURROUNDING PHYSICAL FEATURES, INCLUDING THE EXCAVATION AREA AND DEPTH. THE CORNER MONUMENT SHALL HAVE THE FOLLOWING CHARACTERISTICS: I) HAVE AT LEAST TWO PREDETERMINED BREAK-OFF POINTS. 2) IF BROKEN, LEAVE A PERMANENTLY MAGNETIZED REMNANT AT THE ORIGINAL POINT. 3) MUST BE EXTENDABLE. 4) THE CAP IS INSCRIBED: ROCK COUNTY SURVEY MONUMENT - PENALTY FOR DISTURBING MARKER. 5) OR AN EXISTING CUT LIMESTONE. AN IRON PIPE 1 1/2" x 4'0" (MINIMUM) WITH AT LEAST 4 DURABLE WITNESS MONUMENTS MAY BE USED IN AREAS WHERE GROUND WATER IS WITHIN I.0' OF THE SURFACE. IF THE CORNER IS OCCUPIED BY AN IMPROVEMENT (MANHOLE, BURIED CABLE, ETC.), ANY DURABLE, DISTINCT MONUMENT MAY BE USED AND REFERENCED WITH AT LEAST 4 DURABLE WITNESS MONUMENTS.

	screpancy between the location of the -established and the location of that tored or re-established.
Was the corner restored to evidence location or a for	through acceptance of an obliterated ound perpetuated location.
Monument was not used for	a survey. The corner is only being shown
1	onument needs to checked with the record
	onument needs to checked with the record
evidence in Jefferson Coun	ty.
Was the corner re-establimethods? If so, show the	ished through lost corner proportionate method, including directions and cland survey corners used as evidence in determination of the corner locations.
Was the corner re-establimethods? If so, show the	ished through lost corner proportionate method, including directions and cland survey corners used as evidence
Was the corner re-establimethods? If so, show the	ished through lost corner proportionate method, including directions and cland survey corners used as evidence
Was the corner re-establimethods? If so, show the	ished through lost corner proportionate method, including directions and cland survey corners used as evidence
Was the corner re-establimethods? If so, show the	ished through lost corner proportionate method, including directions and cland survey corners used as evidence
Was the corner re-establimethods? If so, show the	ished through lost corner proportionate method, including directions and cland survey corners used as evidence
Was the corner re-establimethods? If so, show the distances to other public or used for proportioning as identified by the corner Tyne 1982, establish recovered or restored as regulations and rules as	ished through lost corner proportionate method, including directions and cland survey corners used as evidence
Was the corner re-established by the corner in June 1982, established as identified by the corner restored as regulations and rules as instructions of the Unite	ished through lost corner proportionate method, including directions and a land survey corners used as evidence in determination of the corner location of the corner location determination determination of the corner location determination de
Was the corner re-established by the corner in June 1982, established as identified by the corner restored as regulations and rules as instructions of the Unite	ished through lost corner proportionate method, including directions and a land survey corners used as evidence in determination of the corner location of the c
Was the corner re-established by the corner in June 1982, established as identified by the corner restored as regulations and rules as instructions of the Unite	ished through lost corner proportionate method, including directions and cland survey corners used as evidence in determination of the corner location of the corner location determination determination of the corner location determination det
Was the corner re-established by the corner in June 1982, established as identified by the corner restored as regulations and rules as instructions of the Unite	ished through lost corner proportionate emethod, including directions and cland survey corners used as evidence in determination of the corner location determination of the corner location of the corner location determination determination of the corner location determination determi
Was the corner re-established by the corner in June 1982, established as identified by the corner restored as regulations and rules as instructions of the Unite	ished through lost corner proportionate method, including directions and cland survey corners used as evidence in determination of the corner location of the corner location determination determination of the corner location determination det