
- The edge of the driveway or the end of the Culvert, at the center of Highway ditch shall not be closer than (5) feet from any property line.
- o. 2 The size (diameter and length) of the Culvert shall be as specified by the Rock County Highway Department Personnel.
- o. 3 No Portion of the Driveway shall be closer than 100 feet from the nearest edge of the Right of Way of an intersecting public road at an intersection
- o. 4 The edge of the Driveway, at the center of the Highway ditch shall not be closer than 20 feet from the edge of another Driveway at the center of the Highway ditch.
- No concrete or stone endwalls or any other material that could constitute a menace to Highway Safety may be used. The ground surrounding the end of the Driveway shall be sloped in a gentle slop, back to the Highway ditch. However, tandard apron endsections, either metal or concrete may be used.
  - . 6 When the Driveway is in an area <u>sloping up</u> from the Highway, the following general design must befollowed:

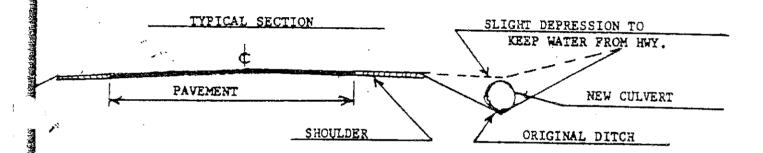

Six inch minimum gravel cover over culvert

- o. 7 The Driveway shall always be the sole responsibility of the land owner.
- Rock County Highway Department and its duly appointed agents and employees against any action for personal injury or property damage sustained by reason of this permit.
- Rock County does not assume any responsibility for the removal or clearance of snow, ice, or sleet, or the opening of windrow of such material, upon any portion of any Driveway or entrance along any County Highway, even hough snow, ice or sleet is deposited or windrowed on said driveway or entrance by its authorized representatives engaged in normal Winter Maintenance Operations.

No Concrete Surfacing Shall be placed in Highway Right of Way

ROCK COUNTY HIGHWAY COMMISSION

... Durlin L. Harnack, -Highway Commissioner

Acce : Control Road

